

HR-3000-S-M Monochrome
HR-3000-S-C Color



High Speed 10GigE SFP+ Interface
10x the Speed of GigE
Cable lengths from 1M to 10KM
No Fiber Converters Needed
No Frame Grabbers
GigE Vision Compliant




HR-3000-S SERIES - 3.2MP


HR-3000-S-M MONOCHROME / HR-3000-S-C COLOR



Spectral Sensitivity

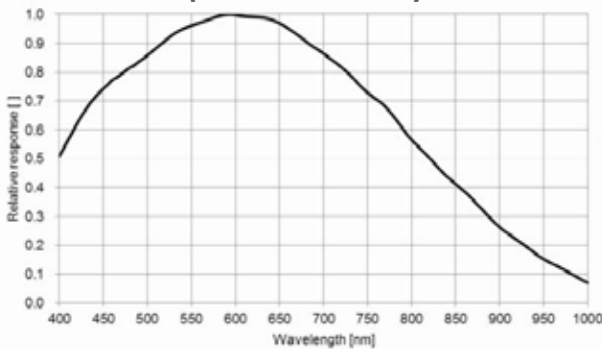

Front View Dimensions



58mm

Side View Dimensions



40mm

97mm

*Please refer to 3d Mechanicals available to download from our website for exact measurements

APPLICATIONS

Broadcast Sports Technology
Intelligent Traffic Systems
Food and Beverage Inspection
Diagnostic Analysis
Semiconductor
Automotive
Medical Imaging

EMERGENT VISION TECHNOLOGIES

7-11720 Stewart Crescent
Maple Ridge, British Columbia, V2X 9E7 Canada
Ph: 1-866-780-6082 E-Mail: sales@emergentvisiontec.com
emergentvisiontec.com

Sensor	Sony IMX252*
Resolution	2048 x 1536
Megapixels	3.2MP
Sensor Type	1/1.8" CMOS
Max Frame Rate	216 fps
Cell Size	3.45µm
Standard Mount	C Mount
Shutter	Global
Bit Depth	8, 10, 12 bit
GPIO / Triggering	2 in, 4 out Software, External (Pulse or Edge)
Interface	SFP+ 10GigE
*Exposure/Integration	10µs-1s
Dynamic Range	71 dB
Digital Output	8, 10, 12 bit
Monochrome Modes	Mono8, Mono10, Mono10Packed, Mono12, Mono12Packed
Color Modes	RGB8, RGB10, RGB12, BGR8, BGR10, BGR12, YUV411, YUV422, YUV444
Raw Modes	BayerRG8, BayerRG10, BayerRG10Packed, BayerRG12, BayerRG12Packed
Frame Buffer	60 frames (8bpp, Full Frame)
Memory	500MB DDR2, 125MP NOR FLASH
Operating System	Windows 7/8/10, Linux (64bit)
Compliance	CE, FCC, RoHS, WEEE, GigE Vision, GenICam
Power Requirements	9W, 12V
Operating Temperature	0C - 45C
Storage Temperature	-30C to +60C
Dimensions & Weight	97 x 58 x 40 - 350g
Warranty	2 Years

*all minimum exposure specs can vary from what is listed based on the limitations of each sensor as per notice from the manufacturer.